

卫生级管件

产品概述

产品符合ISO2851、ISO1127、DIN、SMS、3A、BS等标准卫生级管件，产品均为无缝管冷压成形。

金属材质均可提供EN10204、3.1B证书。

技术参数

工作压力：0~10bar

连接方式：焊接

表面处理：客户定制（未抛光面、180~420 Grit）

材料规格


部件	材料	标准
金属材质	不锈钢	304/304L/316/316L

产品图例



规格尺寸

ISO1127-I.2WK45°

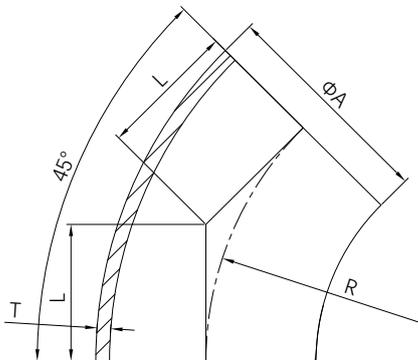


ISO1127 45° 弯头

尺寸	ΦA	R	T
13.5	13.5	20	1.6
17.2	17.2	28	1.6
21.3	21.3	30	1.6
26.9	26.9	28(min)	1.6
33.7	33.7	38	2
42.4	42.4	47.5	2
48.3	48.3	57	2
60.3	60.3	76	2
76.1	76.1	95	2
88.9	88.9	114.5	2.3
101.6	101.6	133	2.3
114.3	114.3	152	2.3

卫生级管件

规格尺寸

ISO1127-I.2WK90°

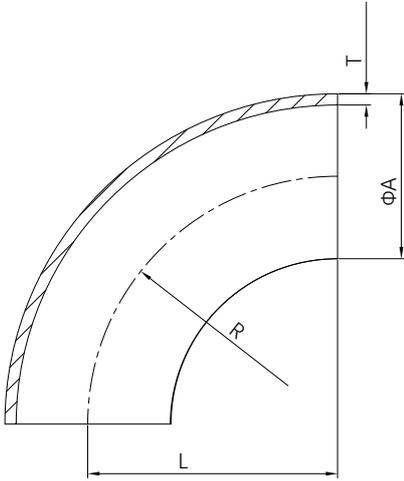


ISO1127 90° 弯头

尺寸	ΦA	R	L	T
13.5	13.5	20	20	1.6
17.2	17.2	28	28	1.6
21.3	21.3	30	30	1.6
26.9	26.9	28(min)	28(min)	1.6
33.7	33.7	38	38	2
42.4	42.4	47.5	47.5	2
48.3	48.3	57	57	2
60.3	60.3	76	76	2
76.1	76.1	95	95	2
88.9	88.9	114.5	114.5	2.3
101.6	101.6	133	133	2.3
114.3	114.3	152	152	2.3

规格尺寸

ISO1127-I.3WK180°

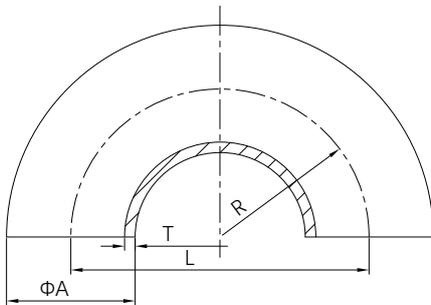


ISO1127 180° 弯头

尺寸	ΦA	R	T
13.5	13.5	40	1.6
17.2	17.2	56	1.6
21.3	21.3	60	1.6
26.9	26.9	56	1.6
33.7	33.7	76	2
42.4	42.4	95	2
48.3	48.3	114	2
60.3	60.3	152	2
76.1	76.1	191	2
88.9	88.9	229	2.3
101.6	101.6	267	2.3
114.3	114.3	305	2.3

卫生级管件

规格尺寸

ISO1127-I.L7W

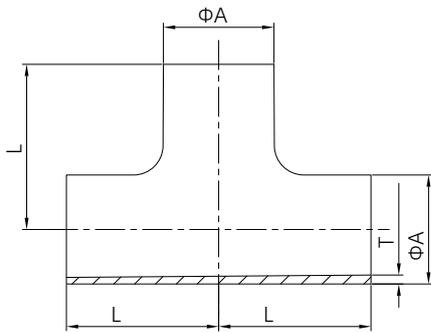


ISO1127 等径三通

尺寸	ΦA	L	T
13.5	13.5	20	1.6
17.2	17.2	28	1.6
21.3	21.3	30	1.6
26.9	26.9	28(min)	1.6
33.7	33.7	38	2
42.4	42.4	48	2
48.3	48.3	57	2
60.3	60.3	64	2
76.1	76.1	76	2
88.9	88.9	86	2.3
101.6	101.6	95	2.3
114.3	114.3	105	2.3

规格尺寸


ISO1127-I.L7WWW

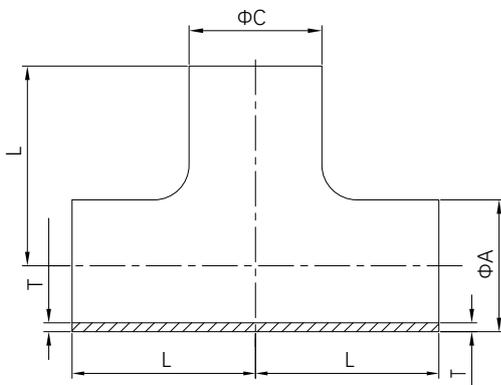


ISO1127 变径三通

尺寸	ΦA	ΦC	L	T
26.9 x 21.3	26.9	21.3	29	2.0
33.7 x 21.3	33.7	21.3	38	2.0
33.7 x 26.9	33.7	26.9	38	2.0
42.4 x 21.3	42.4	21.3	48	2.0
42.4 x 26.9	42.4	26.9	48	2.0
42.4 x 33.7	42.4	33.7	48	2.0
48.3 x 21.3	48.3	21.3	57	2.0
48.3 x 26.9	48.3	26.9	57	2.0
48.3 x 33.7	48.3	33.7	57	2.0
48.3 x 42.4	48.3	42.4	57	2.0
60.3 x 26.9	60.3	26.9	64	2.0
60.3 x 33.7	60.3	33.7	64	2.0
60.3 x 42.4	60.3	42.4	64	2.0
60.3 x 48.3	60.3	48.3	64	2.0
76.1 x 33.7	76.1	33.7	76	2.0
76.1 x 42.4	76.1	42.4	76	2.0
76.1 x 48.3	76.1	48.3	76	2.0
76.1 x 60.3	76.1	60.3	76	2.0
88.9 x 42.4	88.9	42.4	86	2.3
88.9 x 48.3	88.9	48.3	86	2.3
88.9 x 60.3	88.9	60.3	86	2.3
88.9 x 76.1	88.9	76.1	86	2.3
101.6 x 42.4	101.6	42.4	95	2.3
101.6 x 48.3	101.6	48.3	95	2.3
101.6 x 60.3	101.6	60.3	95	2.3
101.6 x 76.1	101.6	76.1	95	2.3
101.6 x 88.9	101.6	88.9	95	2.3
114.3 x 48.3	114.3	48.3	105	2.3
114.3 x 60.3	114.3	60.3	105	2.3
114.3 x 76.1	114.3	76.1	105	2.3
114.3 x 88.9	114.3	88.9	105	2.3
114.3 x 101.6	114.3	101.6	105	2.3

注意：由于产品的持续研发，上面列出的信息可能会随时更改，恕不另行通知

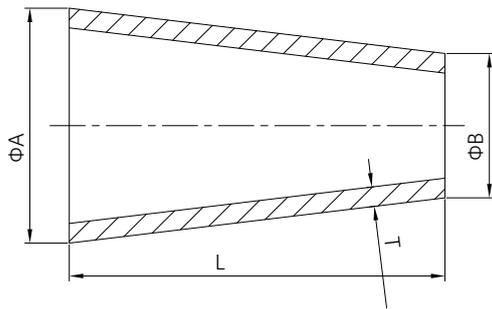

ISO1127 同心变径

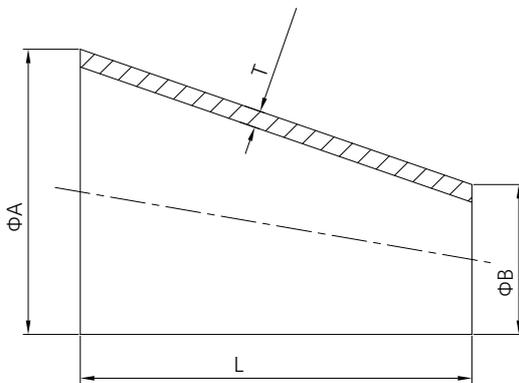

ISO1127 偏心变径

尺寸	ΦA	ΦC	L	T
26.9 x 17.3	26.9	17.3	38	1.6
26.9 x 21.3	26.9	21.3	38	2.0
33.7 x 21.3	33.7	21.3	51	2.0
33.7 x 26.9	33.7	26.9	51	2.0
42.4 x 21.3	42.4	21.3	51	2.0
42.4 x 26.9	42.4	26.9	51	2.0
42.4 x 33.7	42.4	33.7	51	2.0
48.3 x 21.3	48.3	21.3	64	2.0
48.3 x 26.9	48.3	26.9	64	2.0
48.3 x 33.7	48.3	33.7	64	2.0
48.3 x 42.4	48.3	42.4	64	2.0
60.3 x 26.9	60.3	26.9	76	2.0
60.3 x 33.7	60.3	33.7	76	2.0
60.3 x 42.4	60.3	42.4	76	2.0
60.3 x 48.3	60.3	48.3	76	2.0
76.1 x 33.7	76.1	33.7	89	2.0
76.1 x 42.4	76.1	42.4	89	2.0
76.1 x 48.3	76.1	48.3	89	2.0
76.1 x 60.3	76.1	60.3	89	2.0
88.9 x 42.4	88.9	42.4	89	2.3
88.9 x 48.3	88.9	48.3	89	2.3
88.9 x 60.3	88.9	60.3	89	2.3
88.9 x 76.1	88.9	76.1	89	2.3
101.6 x 42.4	101.6	42.4	102	2.3
101.6 x 48.3	101.6	48.3	102	2.3
101.6 x 60.3	101.6	60.3	102	2.3
101.6 x 76.1	101.6	76.1	102	2.3
101.6 x 88.9	101.6	88.9	102	2.3
114.3 x 48.3	114.3	48.3	102	2.3
114.3 x 60.3	114.3	60.3	102	2.3
114.3 x 76.1	114.3	76.1	102	2.3
114.3 x 88.9	114.3	88.9	102	2.3
114.3 x 101.6	114.3	101.6	110205	2.3

注意：由于产品的持续研发，上面列出的信息可能会随时更改，恕不另行通知