

卫生级快装接头

产品概述

产品符合ISO2852、ISO1127/GB、DIN、SMS、3A、BS4825-3等标准卫生级快装接头，产品均为棒材加工。

金属材质均可提供EN10204、3.1B证书。

密封材料符合FDA177.2600要求。

技术参数

工作压力：0~10bar

安装方式：无角度限制

连接方式：焊接（螺纹组装）

表面处理：内表面 Ra=0.4~0.8um

外表面 Ra=0.8~1.6um

工作温度：EPDM/-20~+135°C

VITON/-30~+230°C

SILICONE/-50~+180°C

PTFE/-30~+230°C

产品图例




材料规格

部件	材料	标准
金属材质	不锈钢	304/304L/316/316L
密封材质	橡胶	NBR/Silicone/EPDM/FPM/PTFE

规格尺寸

ISO-14WMP/14MMP/14AMP

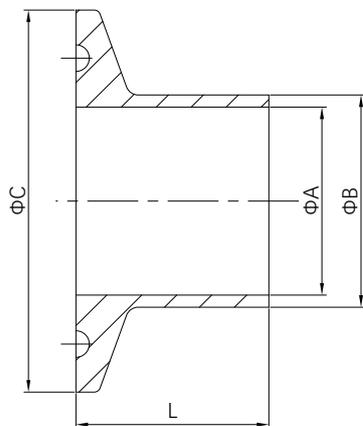


尺寸	ΦA	ΦB	C	L		
				14WMP	14MMP	14AMP
10.2	7.0	10.2	34.0	12.7	21.5	28.6
13.5	10.3	13.5	34.0	12.7	21.5	28.6
17.2	14.0	17.2	34.0	12.7	21.5	28.6
21.3	18.1	21.3	34.0	12.7	21.5	28.6
26.9	23.7	26.9	50.5	12.7	21.5	28.6
33.7	29.7	33.7	50.5	12.7	21.5	28.6
42.4	38.4	42.4	50.5	12.7	21.5	28.6
48.3	44.3	48.3	64.0	12.7	21.5	28.6
60.3	56.3	60.3	77.5	12.7	21.5	28.6
76.1	71.5	76.1	91.0	12.7	21.5	28.6
88.9	84.3	88.9	106.0	12.7	21.5	28.6
114.3	109.1	114.3	130.0	15.8	21.5	28.6
139.7	134.5	139.7	155.0	15.8	21.5	28.6
168.3	163.1	168.3	183.0	-	21.5	28.6
219.1	213.9	219.1	233.5	-	21.5	28.6

注意：由于产品的持续研发，上面列出的信息可能会随时更改，恕不另行通知

卫生级快装接头

规格尺寸


ISO2852-14WMP/14MMP/14AMP

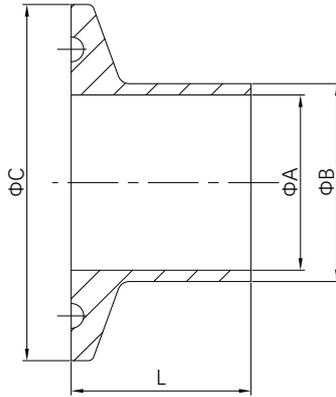

尺寸	ΦA	ΦB	C	L		
				14WMP	14MMP	14AMP
25	22.6	25	50.5	12.7	21.5	28.6
33.7	30.7	33.7	50.5	12.7	21.5	28.6
38	35.6	38	50.5	12.7	21.5	28.6
40	37.6	40	64.0	12.7	21.5	28.6
51	48.6	51	64.0	12.7	21.5	28.6
63.5	60.3	63.5	77.5	12.7	21.5	28.6
70	66.8	70	91	12.7	21.5	28.6
76.1	72.9	76.1	91	12.7	21.5	28.6
88.9	84.9	88.9	106	12.7	21.5	28.6

规格尺寸


GB-14WMP/14MMP/14AMP

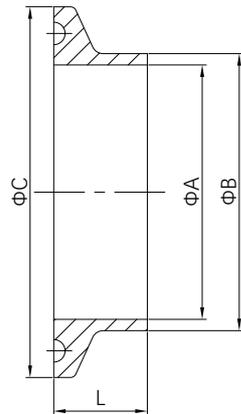

尺寸	ΦA	ΦB	C	L		
				14WMP	14MMP	14AMP
25	22	25	50.5	12.7	21.5	28.6
32	29	32	50.5	12.7	21.5	28.6
38	35	38	50.5	12.7	21.5	28.6
45	41	45	64.0	12.7	21.5	28.6
57	53	57	77.5	12.7	21.5	28.6
76	72	76	91.5	12.7	21.5	28.6
89	85	89	106	12.7	21.5	28.6
108	104	108	119	15.8	21.5	28.6

规格尺寸

DIN-14WMP/14MMP/14AMP

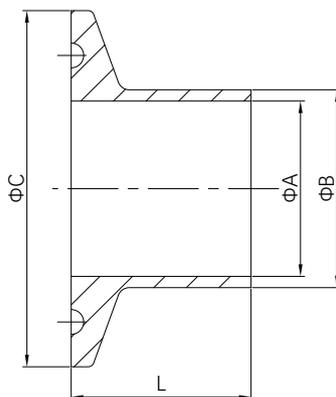

尺寸	ΦA	ΦB	C	L		
				14WMP	14MMP	14AMP
10	9/10	12/13	34	12.7	21.5	28.6
15	15/16	18/19	34	12.7	21.5	28.6
20	19/20	22/23	34	12.7	21.5	28.6
25	25/26	28/29	50.5	12.7	21.5	28.6
32	31/32	34/35	50.5	12.7	21.5	28.6
40	37/38	40/41	50.5	12.7	21.5	28.6
50	49/50	52/53	64	12.7	21.5	28.6
65	66	70	91	12.7	21.5	28.6
80	81	85	106	12.7	21.5	28.6
100	100	104	119	15.8	21.5	28.6
125	125	129	155	15.8	21.5	28.6
150	150	154	183	15.8	21.5	28.6
200	200	204	233.5	15.8	21.5	28.6